

**Precise non-contact
temperature measurement
from –50 °C to 1050 °C in rough
environmental conditions**



Features:

- The new infrared thermometer for hot environmental temperatures up to 250 °C without any need of cooling
- A variety of applications in dryers, ovens, heat treatment lines in the metal and glass industry, paper, plastic and textile manufacturing and semiconductor processing in the temperature range of –50 °C to 1050 °C and a response time up from 40 ms
- Selectable analog outputs: 0/4 – 20 mA, 0 – 5 V, 0 – 10 V, thermocouple type K
- Optional EtherNet/IP, Profinet, Ethernet TCP/IP / Modbus TCP, Modbus RTU, RS485, RS232 interface or relay outputs (2 x optically isolated)
- Easy and flexible exchange of sensing heads

General specifications

Environmental rating	IP 65 (NEMA-4)
Operating temperature range ¹⁾	–20 °C ... 250 °C (sensing head) –20 °C ... 85 °C (electronics)
Storage temperature	–40 °C ... 250 °C (sensing head) –40 °C ... 85 °C (electronics)
Operating air humidity range	10–95 %, non condensing
Vibration (sensor)	IEC 60068-2-6 (sinus shaped) IEC 60068-2-64 (broadband noise)
Shock (sensor)	IEC 60068-2-27 (25G and 50G)
Weight	200 g (sensing head incl. massive housing) / 420 g (electronics)

Electrical Specifications

Output / analog (2x)	0 / 4 – 20 mA, 0 – 5 / 10 V, thermocouple K, alarm
Output / alarm	24 V / 50 mA (open collector)
Relay outputs (optional)	2 x 60 V DC / 42 V AC _{RMS} ; 0.4 A; optically isolated
Digital Interfaces	built-in USB-interface, Optional: EtherNet/IP, Profinet, Ethernet TCP/IP / Modbus TCP, Modbus RTU, RS485, RS232 or relay outputs (2 x optically isolated)
Output impedances	mA max. 500 Ω (with 8 – 36 V DC) mV min. 100 kΩ load impedance thermocouple 20 Ω
I/O Pins (3x)	flexible programming as in- or output: external emissivity adjustment, ambient temperature compensation, uncommitted value, trigger (reset of holdfunctions), alarm output (open collector 24 V / 50 mA)
Cable length	3 m (standard), 8 m, 15 m
Power supply	8 - 30 V DC / 1.2W

Measurement specifications


Measuring Temperature range (scalable via programming keys or software / App)	–50 °C ... 1050 °C
Spectral range	8 – 14 μm
Optical resolution (90% energy)	2:1 10:1
Smallest spot size	3.0 mm @30 mm (LThot 10:1 CF1 lens)
Measurement uncertainty ^{2), 3), 4), 5), 7)}	±1.5 °C or ±1 %
Repeatability ^{2), 3), 4), 5), 7)}	±0.13 °C or ±0.1 % (LThot 2:1) ±0.16 °C or ±0.1 % (LThot 10:1)
Temperature resolution (display)	0.1 K
NETD (typically) ^{4), 5), 6), 7)}	37 mK (LThot 2:1) 45 mK (LThot 10:1)
Response time (90% energy)	45 ms (LThot 2:1) 40 ms (LThot 10:1)
Emissivity / Gain (adjustable via programming keys or software / App)	0.05–1.100
Transmissivity / Gain (adjustable via programming keys or software / App)	0.05–1.100
Signal processing (parameter adjustable via programming keys or software / App)	Peak hold, valley hold, average; extended hold functions with threshold and hysteresis
Software / App	Optris CompactPlus Connect / IRmobile App

- 1) The LCD displays capacity may be limited at ambient temperatures below 0 °C
- 2) Whichever is greater
- 3) T_{obj} > 0 °C
- 4) ε = 1
- 5) Response time = 200ms
- 6) T_{obj} = 25 °C
- 7) at ambient temperature 23 ± 5 °C


optris CTi LThot

Optical specifications

Optics: SF D:S: 10:1 Optics: SF D:S: 2:1

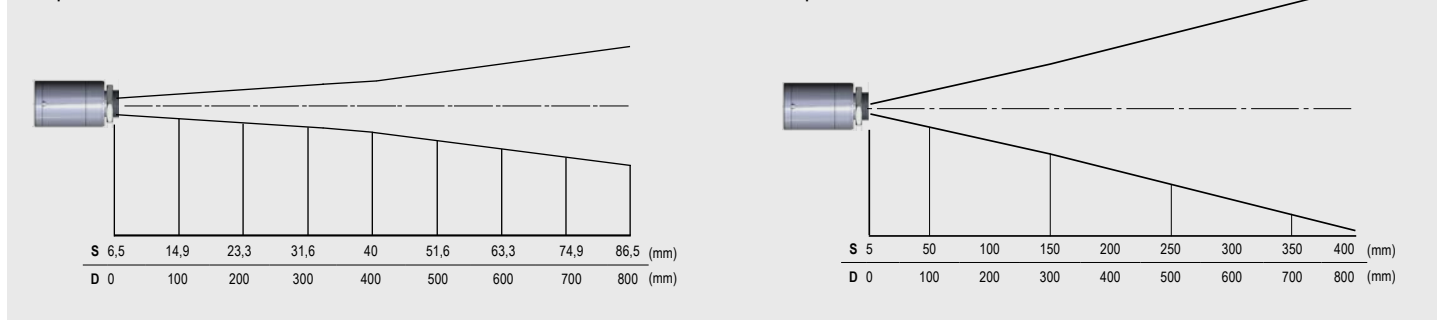

Optics: SF D:S: 10:1 Optics: SF D:S: 2:1

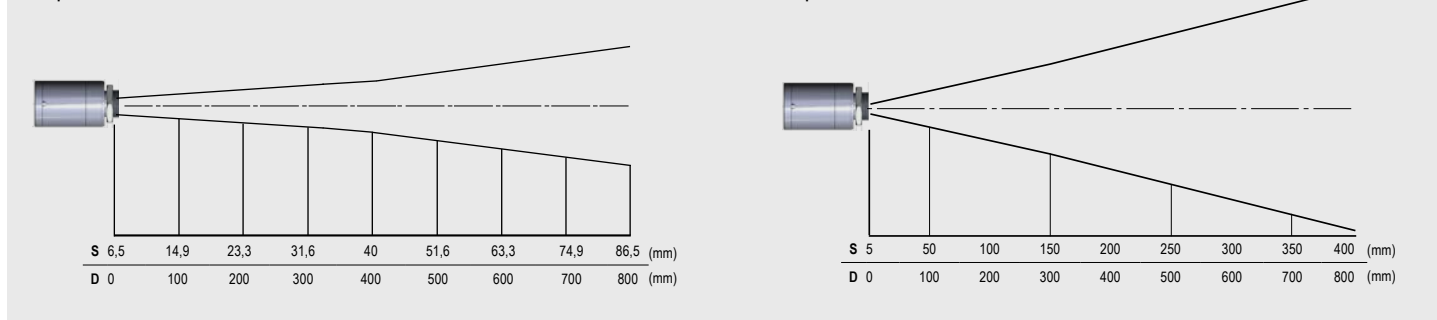

Optics: CF1 | D:S: 10:1
3,0mm@ 30mm | D:S (far field) = 3:1



The diagram illustrates the sensor's field of view (FOV) as a cone originating from the sensor head. The sensor head is shown on the left, and the FOV extends to the right. Below the diagram, a table provides the measurement ranges for different sensor models.


S	6,5	4,8	3	9,4	17,3	25,2	33,1	41	49	57
D	0	15	30	50	75	100	125	150	175	200

Units: (mm) for S, (mm) for D.



Dimensions (in mm)

Electronics

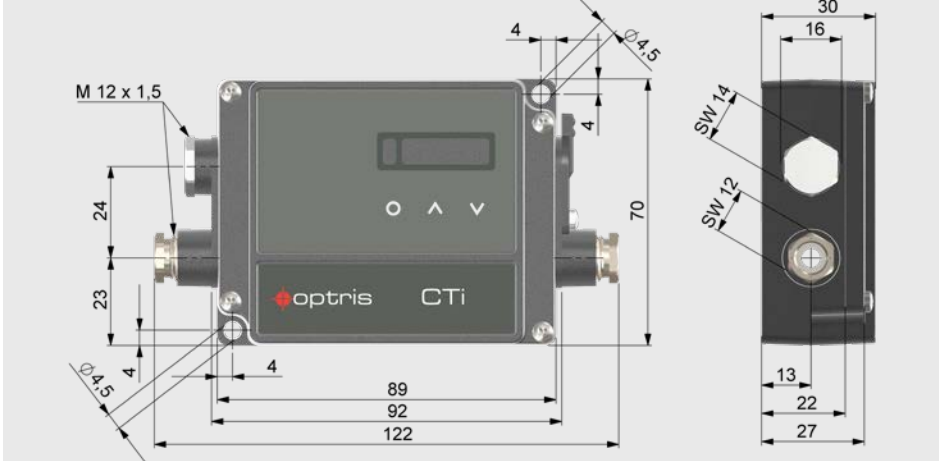

Sensing head
with Massive housing

